ADJUSTING THE HEIGHT OF YOUR MATTRESS SUPPORT

To adjust the vertical position of your mattress support you must remove all the four bolts, washers & nuts **(1+2+3),** loosen all the four bolts **(4)**, lower the frame and insert the bolts **(1)** back into the corresponding holes, according to the desired height. Then, you must attach the lock washers **(2)** and the nuts **(3)** and tighten all the bolts completely.

Your crib is designed in such a manner that, when the mattress support is adjusted to it's lowest position, the mattress support frame must be placed directly over the stabilizing bars. Before tighten the bolts, you must slightly press the mattress support frame to make sure this position is achieved.

WARNING: TO KEEP YOUR BABY SECURE AND SAFE, AND TO AVOID POTENTIAL INJURY OR DEATH, **IT'S VERY IMPORTANT TO TIGHTEN COMPLETELY ALL THE 8 BOLTS (1+2+3) & (4+2) AFTER YOU HAVE ADJUSTED THE HEIGHT OF YOUR MATTRESS SUPPORT.**

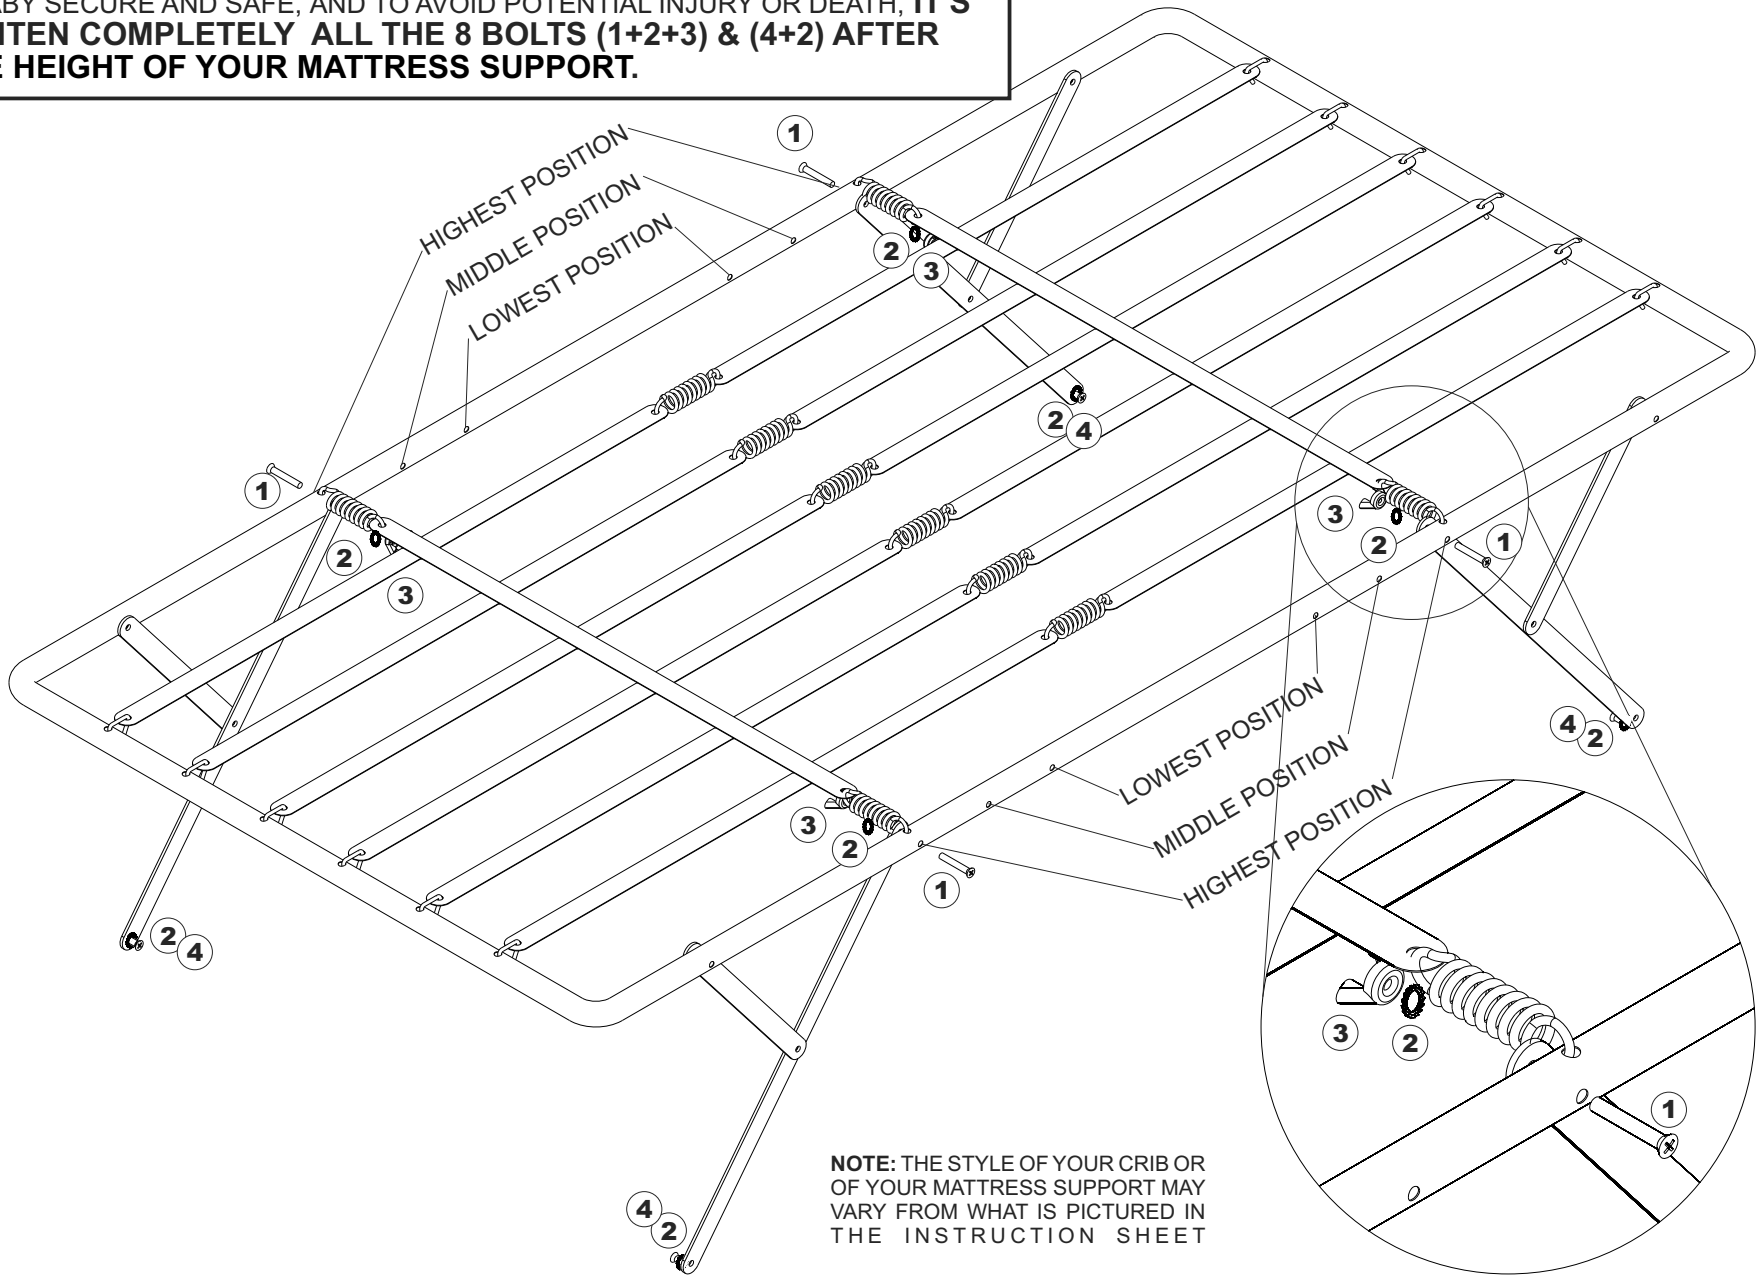

NOTE: THE STYLE OF YOUR CRIB OR OF YOUR MATTRESS SUPPORT MAY VARY FROM WHAT IS PICTURED IN THE INSTRUCTION SHEET